

"3D-S" Series by



The **SERVICEABLE** Machine




(Air Gap Fill)

Eliminates the need for check valves and vacuum breakers.



(20.5" Door Clearance)

Perfect for pizza applications.



(Diagonal Scrap Trap)

Provides easy screen removal in both corner and pass-through models

(Dual Screens)

Protect intake of pump.

(Quick Service Pump)

Pump slides forward providing for easier repair.



(Swift Plumbing Removal)

All plumbing is connected using zero-interference Stainless/Terelene Couplers.



AFC-3D-S

Corner outside sump with built-in scrap accumulator

Save time and money by reducing labor.

You can now machine wash that which was once washed by hand.

At American Dish Service, Quality People, Designs, and Products have been the foundations of our organization for over **45 years**.

www.americandish.com


American Dish Service
Manufacturers of Ware Washing Equipment

900 Blake Street Edwardsville, KS 66111-3820 Toll Free (800) 922-2178 Phone (913) 422-3700 Fax (913) 422-6630

"3D-5" Series

(Additional Options)
Also available with solid chemical dispensing



(Stainless Steel Spray Bases, Bayonets and Manifold Couplings)


Allows for quick release spray arm removal for ease of cleaning



AF-3D-S

Pass-thru outside sump with built-in scrap accumulator


- **Convertible Design**
- **Great door Clearance 20.5"**
- **Quick Service 1 1/2 HP pump**
- **Quick release Spray Arms**
- **Stainless Steel Air Gap**
- **Run indicator light**
- **Simple to clean**
- **Available with solid chemical dispensing**

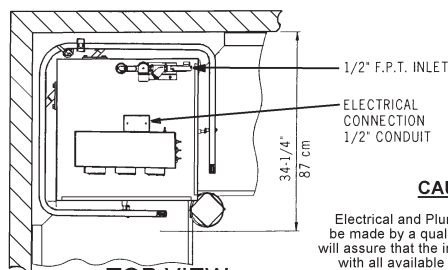


TOP VIEW
CORNER APPLICATION

CAUTION:

Electrical and Plumbing connections must be made by a qualified Service Person who will assure that the installation is in compliance with all available federal, state, and local Health, Electrical, Plumbing, and Safety codes.



TOP VIEW
IN-LINE APPLICATION

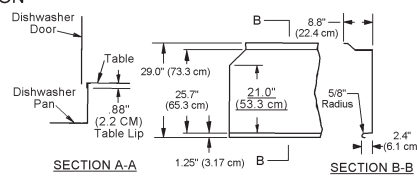


TOP VIEW
TYPICAL TABLE DETAILS


NOTE:
All dimensions listed have a tolerance of + or - 1/8" unless otherwise noted.

NOTE:

Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

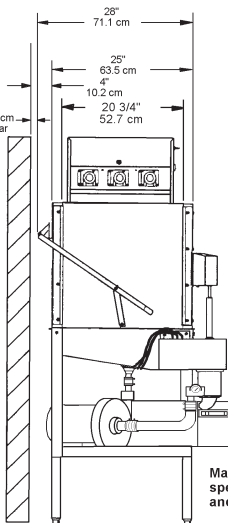

SIDE VIEW

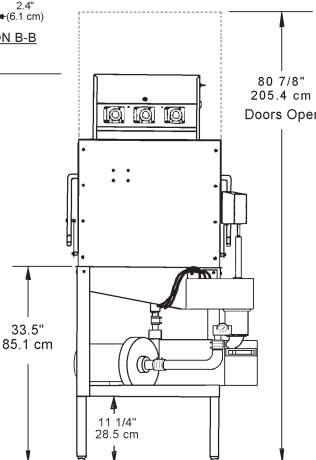

FRONT VIEW

Effective: 10/02

© 10/2002

ADS
American Dish Service
Manufacturers of Ware Washing Equipment

WWW.Americandish.com

MODEL 3D-S SPECIFICATIONS

	FAMILY MODELS
	AF-3DS AH-3DS
	AFC-3DS AHC-3DS
RATED CAPACITY (Racks/Hr.)	37 23
WASH TIME (Sec.)	45 75
RINSE TIME (Sec.)	30 60
DWELL (Sec.)	15 15
TOTAL CYCLE TIME (Sec.)	90 150
WATER TEMPERATURE (Supply)	120 F Min. 49 C Min.
WATER CONSUMPTION	2.2 Gal's Per Cycle 8.3 Lit's Per Cycle
MOTOR	1.5 HP 1.125 KW
ELECTRICAL RATINGS	115 Volts Single Phase
Connect to Supply Source using 10-12 AWG copper wires. Circuit Protection: 20 AMP Circuit Breaker or Fuse with a 20 AMP Rating.	
RACK SIZE	19-3/4" x 19-3/4" 50.2 cm x 50.2 cm
DOOR CLEARANCE	20-3/4" x 20-1/2" 52.7 cm x 52.1 cm
WATER INLET	1/2" FPT
DRAIN (Scrap Trap)	2" Pipe
HEIGHT (Door Open)	80-7/8" 205.4 cm
HEIGHT (Door Closed)	70-1/2" 179.1 cm
WIDTH (Overall)	33-1/2" 85.1 cm
WIDTH (Table to Table)	25" 63.5 cm
DEPTH (Overall)	34-1/2" 86.9 cm
SHIPPING WEIGHT	312 lb. 141.5 kg
SHIPPING DIMENSIONS	36"L x 36"W x 78"H 91.4 cm x 91.4 cm x 198.1 cm

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ADS has built a strong history based on Customer Service, Quality and Reliability.
A Commitment to Excellence is the driving force behind American Dish Service.

Toll Free Phone Fax
900 Blake Street Edwardsville, KS 66111-3820 (800) 922-2178 (913) 422-3700 (913) 422-6630